

Cx30 Cx30 SE



Windows Desktop POS Terminal



**Enterprise-scale Windows Performance
and Optimized Value.**

LANDi www.landiglobal.com

*Specifications and features are preliminary and
may be modified before product release.

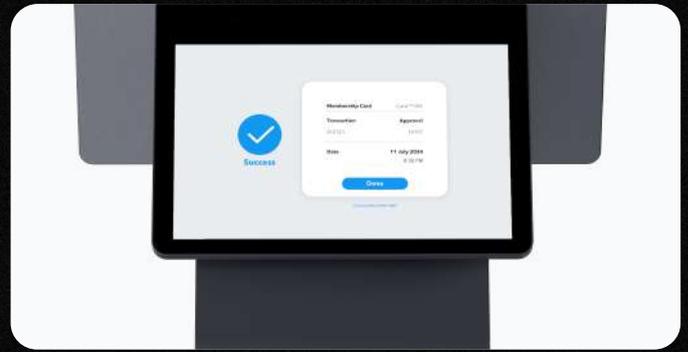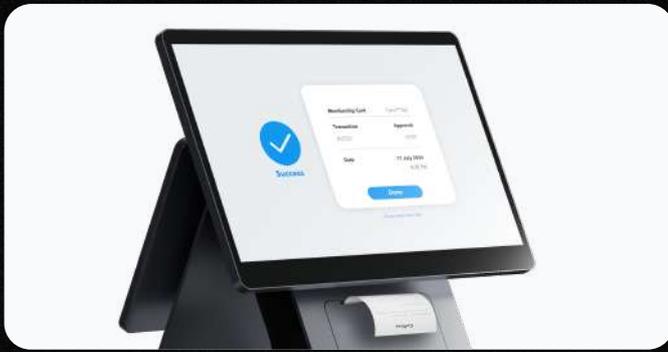

- **Intel® Core™ i5 | 10-Core Power**

Top-tier 12 threads, 4.4 GHz with up to 16GB RAM + 512GB SSD for unstoppable multitasking.

- **Windows 11 IoT LTSC Ready**

Enterprise-secure, long-term supported OS built for commercial stability.

- **15.6" FHD Touch + Optional 2nd Screen**

Vivid dual-display interaction with 10.1" or 15.6" customer-facing touchscreen.

- **Modular & Fully Connected**

MSR & Camera-ready with Wi-Fi 6E, BT 5.3 & Gigabit Ethernet for versatile business setups.

SPECIFICATIONS

Item	Cx30	Cx30 SE	Connectivity	NONE	
Processor	Deca core, up to 4.4Ghz			Wi-Fi 6E : IEEE 802.11 a/b/g/n/ac/ax, 2x2 MU-MIMO, 2.4Ghz and 5Ghz ETH : 1000M	
OS	Windows 11 IoT LTSC			Bluetooth 5.3, support BLE	
Memory	8GB RAM + 256GB FLASH 8GB RAM + 512GB FLASH (Optional) 16GB RAM + 256GB FLASH (Optional) 16GB RAM + 512GB FLASH (Optional)		Camera	Optional : 2M pixels, QR code scan (Only supported on the 10.1" Premium CFD)	
Display & Touchscreen	15.6", 1920x1080 px capacitive multi-touch, 178° viewing angle Optional 1 : NONE Optional 2 : Standard CFD attached (10.1", 1280x800 px) Optional 3 : Premium CFD attached (10.1", 1280x800 px, touch, QR camera)		Connection	1*USB Type-C (DP+USB3.0) 4*USB Type-A 2.0 + 1 USB Type-A 3.0 1*RJ22 Serial port 1*RJ45 Ethernet Port 1*RJ11 Cash Drawer Port 1*3.5mm Audio Jack 1*Power Port	
Printer	80mm Thermal Printer, Diameter : 80mm, Print speed : 200mm/s, Auto Cutter	NONE	PSU	19~20V/4.74A	19V/3.42A
keypad	1 Power key with indicator light (red&blue) 2 volumes keys		Size	360mm x 235mm x 360mm	
Audio	5W, 100dB@1m, Dual Speaker 3.5mm audio jack (CTIA&OTMP) Dual MIC		Weight	Single Display: 4.4kg 10.1 CFD: 4.9kg	Single Display: 3.9kg 10.1 CFD: 4.4kg
			Environment	Operating Temperature : 0 C to +40 C Storage Temperature : 20 C to +60 C Operating Humidity : 10% to 90% non-condensing	

